

TECHNICAL DATA

# ABB i-bus® KNX

## SV/S

### KNX-Power Supplies



#### Description of product

KNX power supplies generate and monitor the KNX system voltage (SELV). The bus line is decoupled from the power supply by an integrated choke.

Bus current, bus voltage, overload and other messages can be sent via KNX for monitoring and diagnostic purposes.

The voltage output is short-circuit and overload protected.

The LEDs indicate the bus current consumption and the status of the line or device.

Device type SV/S 30.640.5.1 has an additional 30 V DC short-circuit and overload protected voltage output that can be used to power an additional bus line (in combination with a separate choke).

<b>Technical data</b>		
<b>Supply</b>	Supply voltage $U_s$	100 – 240 V AC, 50/60 Hz (85...265 V AC)
	Power consumption - SV/S 30.320.2.1 - SV/S 30.640.5.1	Normal operation    Maximum 12.5 W                    30 W 24 W                      55 W
	Power loss - SV/S 30.320.2.1 - SV/S 30.640.5.1	Normal operation    Maximum 2.5 W                    6 W 4 W                      9 W
<b>Outputs</b>	KNX voltage output $I_1$ - Rated voltage $U_N$ - Minimum distance between 2 SV/S in one line	1 line with integrated choke 30 V DC +/-2 V, SELV 200 m (KNX bus line)
	Voltage output $I_2$ (SV/S 30.640.5.1 only) - Rated voltage $U_N$	without choke  30 V DC +/-1 V, SELV The voltage output without choke may only be used to power an additional bus line in combination with a separate choke.
	Current - SV/S 30.320.2.1 - SV/S 30.640.5.1 (total current $I_1$ and $I_2$ )	Rated current $I_N$ 320 mA 640 mA
	Current - SV/S 30.320.2.1 - SV/S 30.640.5.1 (total current $I_1$ and $I_2$ )	Overload current $I_{OVI}$ 0,5 A 0,9 A
	Current - SV/S 30.320.2.1 - SV/S 30.640.5.1 (total current $I_1$ and $I_2$ )	Short-circuit current $I_{SC}$ 0,8 A 1,4 A
	Power failure buffering time	200 ms
<b>Connections</b>	KNX	Bus connection terminal
	Mains voltage input	Screw terminal 0.2...2.5 mm <sup>2</sup> fine-strand 0.2...4 mm <sup>2</sup> solid
	Tightening torque	Maximum 0.6 Nm
<b>Operating and display elements</b>	Programming button and LED (red)	For assignment of the physical address
	$U_N$ OK LED (green)	ON: Bus voltage and mains voltage OK
	LED $I > I_{max}$ (red)	ON: Short-circuit or overload
	Bus current LEDs (7 x yellow)	ON: Indicates present bus current
	Telegr. LED (yellow)	ON: Telegram traffic
	Comm. error LED (yellow)	ON: Communication error on bus
	Reset button and LED (red)	ON: Line reset. To reset the device, press the button until the LED comes on. The line is disconnected from the voltage supply for 20 seconds. The LED then goes off again. OFF: Reset is complete.

<b>Degree of protection</b>	IP 20	EN 60 529
<b>Protection class</b>	II	EN 61 140
<b>Isolation category</b>	Overvoltage category	III under EN 60 664-1
	Pollution degree	2 under EN 60 664-1
<b>Temperature range</b>	Operation	- 5 °C...+45 °C
	Storage	-25 °C...+55 °C
	Transport	-25 °C...+70 °C
<b>Ambient conditions</b>	Maximum air humidity	93 %, no condensation allowed
<b>Design</b>	Modular installation device (MDRC)	Modular installation device, Pro M
	Main dimensions	90 x 72 x 64.5 mm (H x W x D)
	Mounting width	4 x 18 mm modules
	Mounting depth	64.5 mm
<b>Mounting</b>	On 35 mm mounting rail	EN 60 715
<b>Mounting position</b>	As required	
<b>Weight</b>	Approx. 0.26 kg	
<b>Housing, color</b>	Plastic housing, gray	
<b>Approvals</b>	KNX under EN 50 090-1, -2	
<b>CE mark</b>	In accordance with the EMC guideline and low voltage guideline	

<b>Software</b>				
<b>Device type</b>	<b>Application</b>	<b>Max. number of group objects</b>	<b>Max. number of group addresses</b>	<b>Max. number of associations</b>
<b>SV/S 30.320.2.1</b>	Power Supply, Diagnosis, 320 mA/...*	7	254	254
<b>SV/S 30.640.5.1</b>	Power Supply, Diagnosis, 640 mA/...*	9	254	254

\* ... = Current version number of the application. **Please refer to the software information on our website for this purpose.**

<b>Ordering details</b>					
<b>Device type</b>	<b>Product Name</b>	<b>Order No.</b>	<b>bbn 40 16779 EAN</b>	<b>Weight 1 pcs. [kg]</b>	<b>Packaging [pcs.]</b>
<b>SV/S 30.320.2.1</b>	KNX Power Supply with diagnostics, 320 mA, MDRC	2CDG110145R0011	83766 8	0.26	1
<b>SV/S 30.640.5.1</b>	KNX Power Supply with diagnostics, 640 mA, MDRC	2CDG110146R0011	86669 9	0.26	1

**NOTE**

Please refer to the SV/S KNX-Power Supplies product manual for a detailed description of the application. It is available free of charge at [www.abb.com/knx](http://www.abb.com/knx).

ETS and the current version of the device application are required for programming.

The current version of the application is available for download at [www.abb.com/knx](http://www.abb.com/knx). After import it is available in ETS under ABB/System devices/Power Supplies.

The device does not support the password function of the KNX device in ETS. If you inhibit access to all the project devices using a BCU code, it has no effect on this device. Data can still be read and programmed.

—  
**IMPORTANT**

If the device overheats due to extended overload (> 100 °C in housing) it switches off automatically. All LEDs are OFF. The device can be switched on again only after it has been disconnected from the mains for 60 seconds and has cooled to operational temperature internally.


Eliminate the cause of the overload before switching back on.

When commissioning the device, ensure that the rated current is not continuously exceeded.

The voltage output without choke ( $I_2$ ) is not electrically isolated from the KNX voltage output ( $I_1$ ). It may only be used to power an additional bus line in combination with a separate choke. It may not, for example, be used to power IP devices.

Devices are designed for continuous operation. They are not approved for frequent switching on and off.


**Connection**

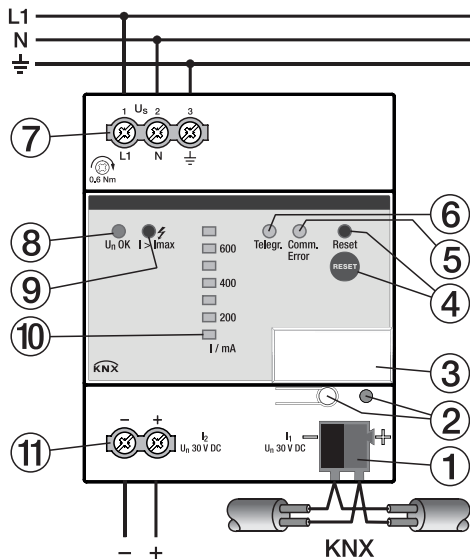


**LEGENDE**

- 1 Bus connection terminal
- 2 Programming button and LED (red)
- 3 Label carrier
- 4 Reset button and LED (red)
- 5 Comm. error LED (yellow)
- 6 Telegr. LED (yellow)
- 7 Power supply connection  $U_s$
- 8  $U_N$  OK LED (green)
- 9  $I > I_{max}$  LED (red)
- 10 Bus current LED (7 x yellow)
- 11 Voltage output without choke,  $I_2$   
(SV/S 30.640.5.1 only)

Dimension drawing

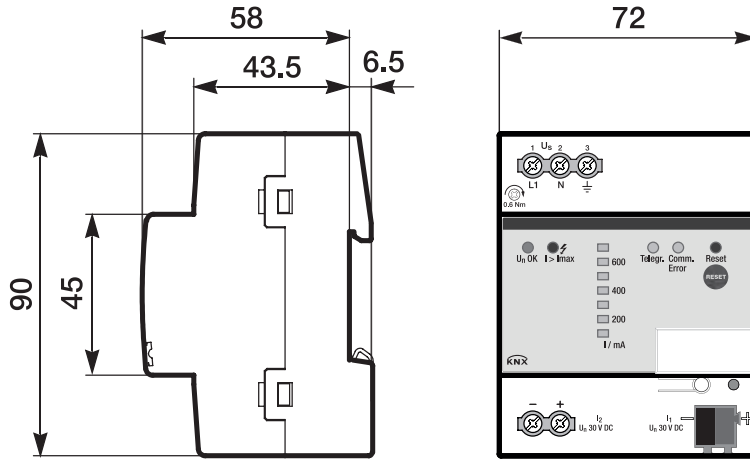

2CDC072004F0013



---

**ABB STOTZ-KONTAKT GmbH**  
Eppelheimer Straße 82  
69123 Heidelberg, Germany  
Telefon: +49 (0)6221 701 607  
Telefax: +49 (0)6221 701 724  
E-Mail: [knx.marketing@de.abb.com](mailto:knx.marketing@de.abb.com)

**Further Information and Local Contacts:**  
[www.abb.com/knx](http://www.abb.com/knx)

---

© Copyright 2018 ABB. We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein.  
Any reproduction, disclosure to third parties or utilization of this contents - in whole or in parts - is forbidden without prior written consent of ABB AG.