

TECHNICAL DATA

ABB i-bus[®] KNX

SA/S 8.6.2.2

Switch Actuator



Switch Actuator SA/S 8.6.2.2

The Switch Actuator is a modular installation device in proM design. The device is designed for installation in electrical distribution boards and small housings for rapid mounting on a 35-mm mounting rail (to EN 60715).


The device possesses mutually independent switching relays with which the following functions can be implemented:

- Switching electric consumers (alternating or three-phase current)

The device is provided with bus voltage via the bus (ABB i-bus® KNX). The connection to the bus (ABB i-bus® KNX) is implemented using the bus connection terminal. The consumers are connected at the outputs using screw terminals (terminal designation on the housing).


The outputs can be switched manually using toggle switches.

Dimension drawing

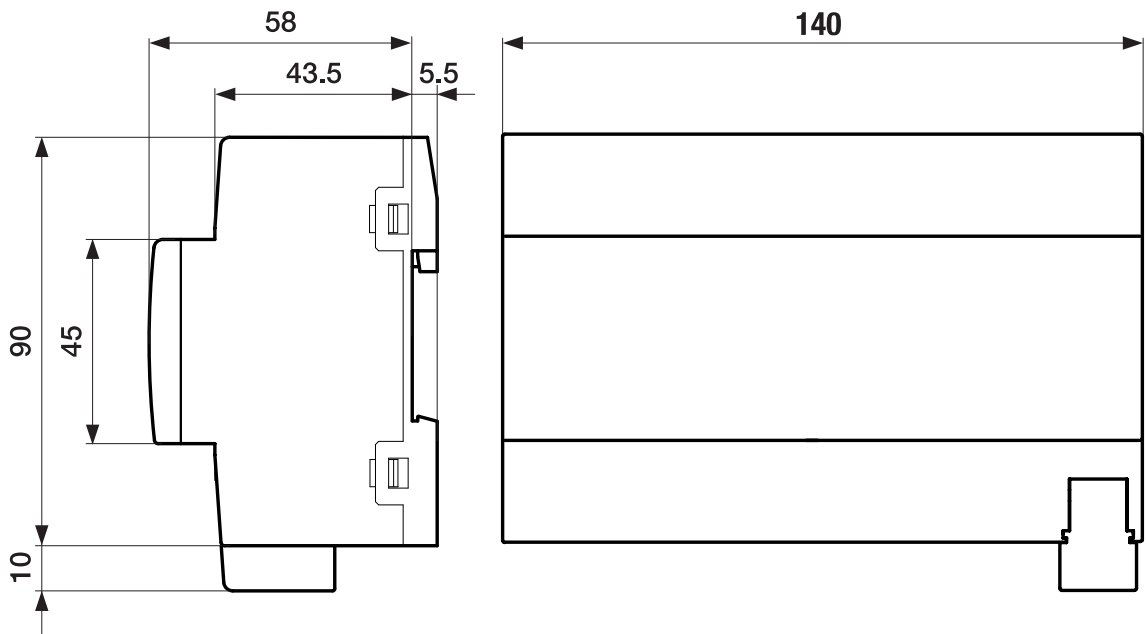

2CDC072027F0017

—
Connection diagram

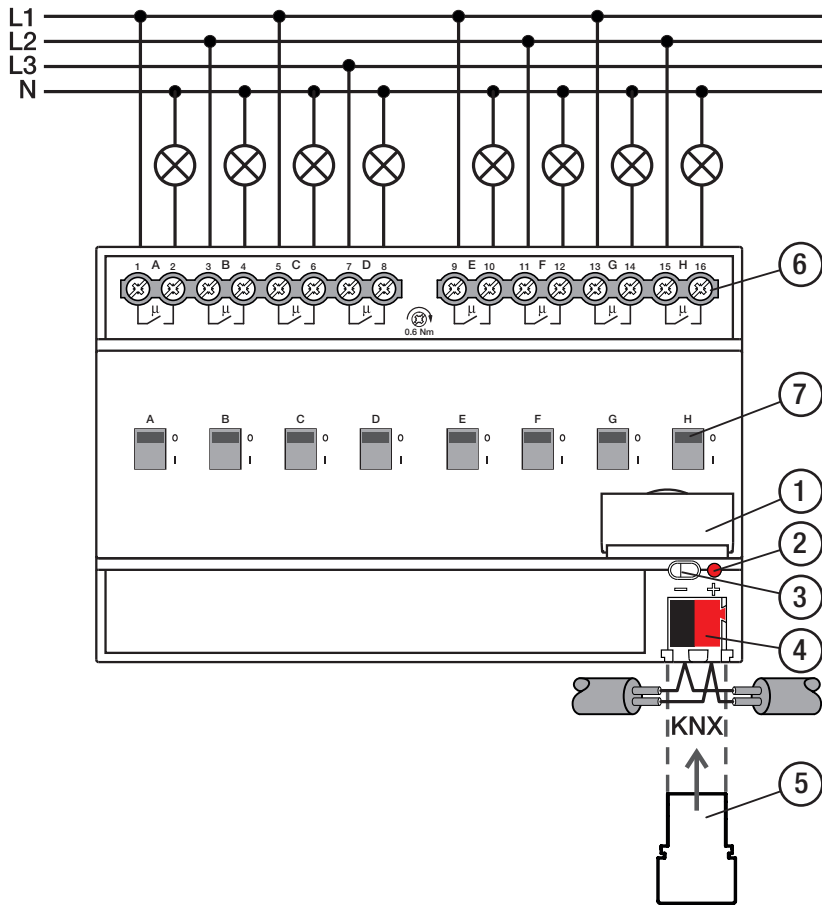

—
Legend

- | | |
|---------------------------|--|
| 1 Label carriers | 5 Cover cap |
| 2 Programming LED | 6 Load circuit, two screw terminals each |
| 3 Programming button | 7 Contact position indication and ON/OFF actuation |
| 4 Bus connection terminal | |

General technical data

Supply	Bus voltage	21 ... 32 V DC
	Current consumption, bus	< 12 mA
	Power loss, bus	Max. 250 mW
	Power loss, device	1.5 W
Connections	KNX	Ø 0.8 mm single core (via bus connection terminal)
Connection terminals	Screw terminal	Screw terminal with universal head (PZ 1)
		0.2 ... 4 mm ² stranded, 2 × (0.2 ... 2.5 mm ²)
		0.2 ... 6 mm ² single core, 2 × (0.2 ... 4 mm ²)
	Ferrule without plastic sleeve	0.25 ... 2.5 mm ²
	Ferrule with plastic sleeve	0.25 ... 4 mm ²
	TWIN ferrules	0.5 ... 2.5 mm ²
	Ferrule contact pin length	Min. 10 mm
	Tightening torque	Max. 0.6 Nm
Degree of protection and protection class	Degree of protection	IP 20 to EN 60529
	Protection class	II to EN 61140
Isolation category	Overvoltage category	III to EN 60664-1
	Pollution degree	II to EN 60664-1
	Fire classification	Flammability V-0 as per UL94
	SELV	KNX safety extra low voltage
Temperature range	Operation	-5 ... +45 °C
	Transport	-25 ... +70 °C
	Storage	-25 ... +55 °C
Ambient conditions	Maximum air humidity	95 %, no condensation allowed
Design	Modular installation device (MDRC)	Modular installation device
	Design	proM
	Housing/color	Plastic, gray
Dimensions	Dimensions	90 × 140 × 63.5 mm (H × W × D)
	Mounting width in space units	8 modules
	Mounting depth	63.5 mm
Mounting	35 mm mounting rail	To EN 60715
	Mounting position	Any
	Weight (net)	0.406 kg
Approvals	KNX certification	To EN 50090-1, -2
	CE marking	In accordance with the EMC and Low Voltage Directives

Device type

Device type	Switch Actuator	SA/S 8.6.2.2
	Application	Switch Standard 8f 6 A / = current version number of the application
	Maximum number of group objects	226
	Maximum number of group addresses	1,000
	Maximum number of assignments	1,000

i Note

Observe software information on the website → www.abb.com/knx.

i Note

The device supports the locking function of a KNX device in ETS. If a BCU code was assigned, the device can be read and programmed only with this BCU code.

Output, rated current 6 A

Rated values	Number of outputs	8
	U_n rated voltage	230 V AC (50/60 Hz)
	I_n rated current (per output pair)	6 A
	Maximum current per device	8 × 6 A
Switching currents	AC3 operation ($\cos \phi = 0.45$) according to EN 60947-4-1	6 A / 230 V AC
	AC1 operation ($\cos \phi = 0.8$) to EN 60947-4-1	6 A / 230 V AC
	Fluorescent lighting load according to EN 60669-1	6 A (140 μ F)
	Minimum switching current at 12 V AC	100 mA
	Minimum switching current at 24 V AC	100 mA
	DC switching capacity, resistive load, at 24 V DC	6 A
Service life	Mechanical service life	> 3 × 10 ⁶ cycles
	Electrical service life of switching contacts to IEC 60947-4-1:	
	AC1 (240 V/ $\cos \phi = 0.8$)	> 10 ⁵ cycles
	AC3 (240 V/ $\cos \phi = 0.45$)	> 3 × 10 ⁴ cycles
	AC5a (240 V/ $\cos \phi = 0.45$)	> 3 × 10 ⁴ cycles
Switching times	Maximum output relay position changes per minute if all relays are switched.	15
	Maximum output relay position changes per minute if only one relay is switched.	120

Output, lamp load 6 A

Lamps	Incandescent lamp load	1,380 W
Fluorescent lamps	Uncompensated	1,380 W
	Parallel compensated	1,380 W
	DUO circuit	1,380 W
Low-voltage halogen lamps	Inductive transformer	1,200 W
	Electronic transformer	1,380 W
	Halogen 230 V	1,380 W
Dulux lamp	Uncompensated	1,100 W
	Parallel compensated	1,100 W
Mercury-vapor lamp	Uncompensated	1380W
	Parallel compensated	1380W
Switching capacity (switching contact)	Maximum peak inrush current I_p (150 μ s)	400 A
	Maximum peak inrush current I_p (250 μ s)	320 A
	Maximum peak inrush current I_p (600 μ s)	200 A
Number of ballasts (T5/T8, single element)	18 W (ABB ballast 1 x 18 SF)	23
	24 W (ABB ballast T5 1 x 24 CY)	23
	36 W (ABB ballast 1 x 36 CF)	14
	58 W (ABB ballast 1 x 58 CF)	11
	80 W (Helvar EL 1 x 80 SC)	10
Energy-saving lamps	LED lamps	400 W
Rated motor power		1,380 W

Note

The peak inrush current I_p is the typical ballast load current that results during switching. Using the peak inrush current I_p , it is possible to calculate the maximum number of switchable ballasts at the Switch Actuator output for the various ballast types. The number of ballasts specified in the table can be only a sample guide value.

—
Ordering details

Description	MB	Type	Order no.	Packaging unit [pcs.]	Weight (incl. packaging) [kg]
Switch	8	SA/S 8.6.2.2	2CDG 110 255 R0011	1	0.500

